

URANUS™ Hammertoe Fixation System is a simple and effective style of hammertoe implant technology. This technique describes the “V”-shaped blade-screw implant that seeks to provide optimal fixation in the proximal and middle phalanx using an “open” technique. Available in 5 sizes, the URANUS™ system provides sizing versatility for a variety of indications and anatomical conditions.











The stainless steel construction of the implants balance strength and workability through the unique design of the one-piece implant. This hybrid design provides secure, multi-axial fixation of hammertoe correction.


Indications for Use

The URANUS™ Hammertoe Implant System is indicated for the fixation of osteotomies and reconstruction of the lesser toes following correction procedures for hammertoe, claw toe and mallet toe.


Implant Information

URANUS™ Hammertoe Fixation Screws

REF (S.S)	SIZES	ANGLE	
MOI 16021009	2.8 X 9 MM	0°	
MOI 16022009	2.8 X 9 MM	10°	
MOI 16023013	2.0 X 13 MM	0°	
MOI 16024013	2.0 X 13 MM	10°	
MOI 16025016	2.4 X 16 MM	0°	
MOI 16026016	2.4 X 16 MM	10°	
MOI 16027016	3.2 X 16 MM	0°	
MOI 16028016	3.2 X 16 MM	10°	
MOI 16029016	4.0 X 16 MM	0°	
MOI 16030016	4.0 X 16 MM	10°	



Implant Information

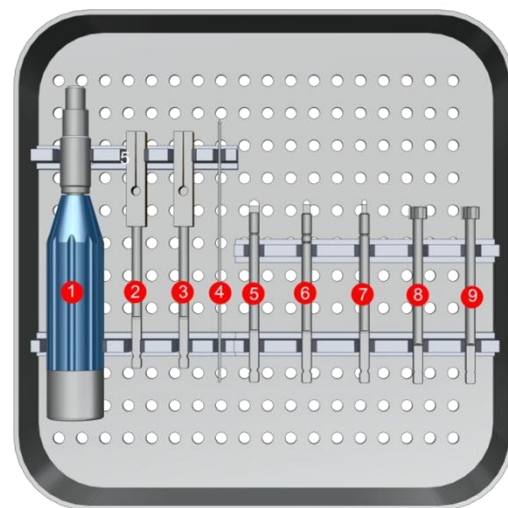

REF	DESCRIPTION	UNITS
MOI 1700001	AO Driver handle	1
MOI 1700002	Driver Tip in 0° Orientation	1
MOI 1700003	Driver Tip in 10° Orientation	1
MOI 1700004	Guide Wire Ø1.2X110 mm	1
MOI 1700005	Broach-X-Large (3.0mm and 4.0mm)	1
MOI 1700006	Broach-Standard (2.0mm and 2.4mm)	1
MOI 1700007	Broach-X-Small (2.8mm)	1
MOI 1700008	6.5 Planar	1
MOI 1700009	7.5 Planar	1



USA OFFICE

4000 Island Blvd, Suite 2704
Aventura, Florida 33160

PUERTO RICO OFFICE

1660 Santa Ana Street
Esq. Fidalgo Diaz,
San Juan, Puerto Rico 00909

E-mail:

info@madisonorthoinc.com

Website:

www.madisonorthoinc.com

